



# BlueDrip®

## Main Features

- Exceptional Linear type
- High clogging resistance with "S" type channel
- Same price in different spacing(10~20cm)
- Superior CV & EU with linear type (not emitter type)



Outlet    Outlet



BlueDrip®

## Specifications & Technical Data


BlueDrip® Flow Rate: 0.8 & 1.0LPH(1bar)

Products		Wall thickness (mm)	Inside Dia (mm)	Spacing (cm)	Working pressure (bar)	Emitter Flow Rate (LPH)	Roll length (m)
Name	Mil						
BlueDrip®	#5	0.125	16	10	0.4	0.60	1,600
						3,600	
	#6	0.15	22	15	0.6	0.75	1,400
						2,800	
	#8	0.20	22	20	0.8	0.90	1,000
						2,100	

BlueDrip® Flow Rate: 0.21/ 0.26 GPH (/hole@14.5psi)


Products		Inside Dia (Inch)	Spacing (Inch)	Flow Rate/100' @8psi		Flow Rate/100' @14.5psi		Roll length (m)
Name	Mil			GPH	GPM	GPH	GPM	
BlueDrip®	#5	5/8"	4"	58	0.97	79	1.32	4,593'
			6"	39	0.65	53	0.88	9,186'
	#6	7/8"	8"	29	0.48	40	0.67	3,280'
			6,889'					

## Pressure performances

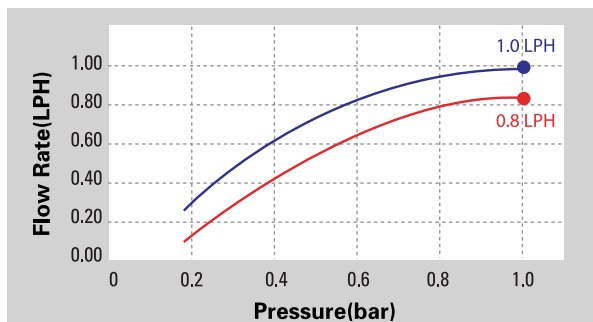

## Distance performances

Inside Dia: 16mm  
1.0bar @ each spacing

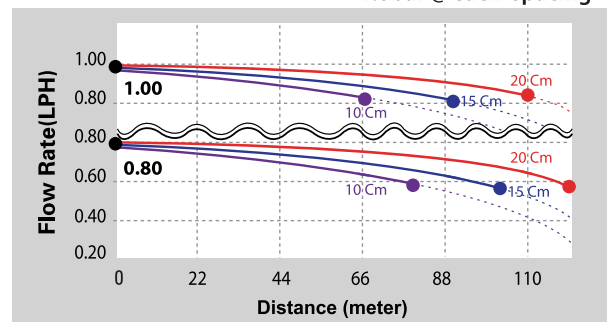

Run Length - 10cm: 70m / 15cm: 95m / 20cm: 110m