

# GoldenDrip®



## Main Features

- Various spacing between emitters for many applications.
- Accurate spacing between emitters.
- High clogging resistance.
- Integrated filter inlet and self cleaning characteristic



Inlet Outlet

GoldenDrip®

## Specifications & Technical Data

GoldenDrip® Flow Rate : 1.45LPH (1bar)

Products		Wall thickness (mm)	Inside Dia (mm)	Spacing (cm)	Working pressure (bar)	Emitter Flow Rate (LPH)	Roll length (m)
Name	Mil						
GoldenDrip®	#8	0.20	16	20, 30	0.4	0.85	1,000
					0.6	1.05	
	#12	0.30			0.8	1.25	
					1.0	1.45	


GoldenDrip® Flow Rate : 0.38GPH (/hole @14.5psi)

Products		Inside Dia (Inch)	Spacing (Inch)	Flow Rate/100' @8psi		Flow Rate/100' @14.5psi		Roll length (ft)
Name	Mil			GPH	GPM	GPH	GPM	
GoldenDrip®	#8	5/8"	8"	42	0.70	57	0.96	3,280'
			12"	28	0.47	38	0.64	
	#12		8"	42	0.70	57	0.96	
			12"	28	0.47	38	0.64	

\* Other roll length and specifications are available to meet customer's needs.


\* CIT Test (EU : 92~94%, CU : 95~96%)

## Pressure Performances

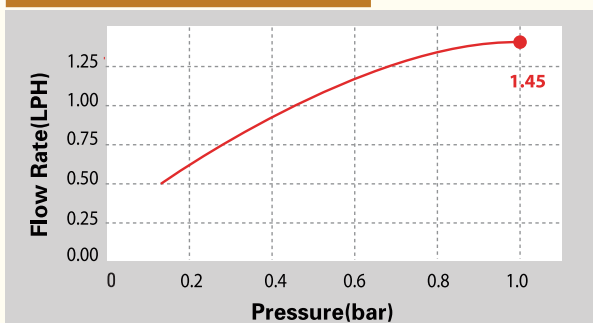

## Distance Performances

Inside Dia: 16mm  
1.0bar @ each spacing

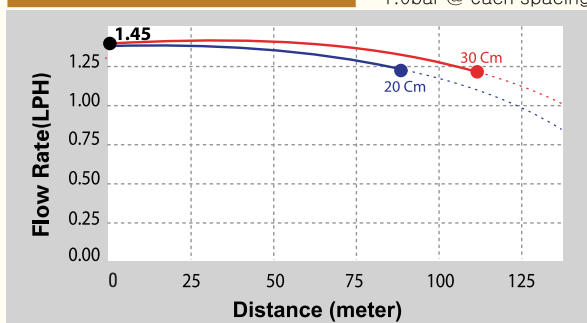

Run Length - 20cm : 88m / 30cm : 113m